



Model :H12C13-32A-F_EN/3

UNIT : mm

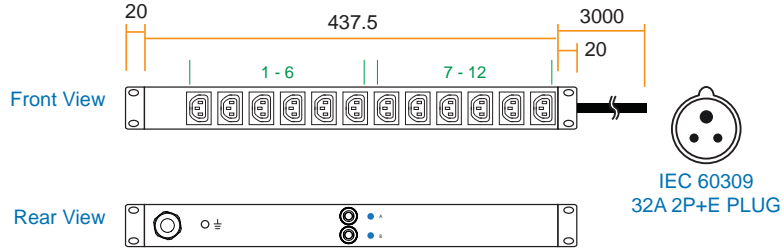


- Cordset : 3 meter 4mm sq H05V V-F cable with IEC60309 32A 2P + E plug
- Fuse : 2 x 16A Resettable Fuse
- Input Rating : 32A / 250Vac
- Safety Regulatory : **FC** **CE**
- Environmental : **REACH**

For 32A Rating PDU, the models which have 12 socket outlets,
< CIRCUIT A > Socket #1-6 C13 socket outlets can only output 16A maximum.
< CIRCUIT B > Socket #7-12 C13 socket outlets can only output 16A maximum.

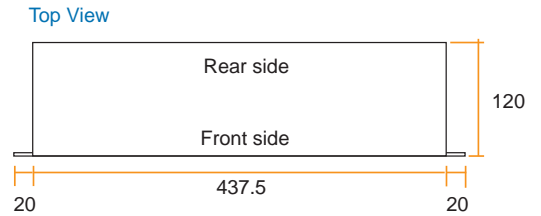


Model :H12C13-20A-F_OE/3

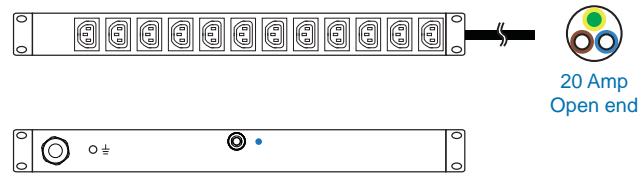

- Cordset : 3 meter 2.5mm sq H05V V-F cable with 20 Amp open-end
- Fuse : 1 x 20A Resettable Fuse
- Input Rating : 20A / 250Vac
- Safety Regulatory : **FC** **CE**
- Environmental : **REACH**

Model :H12C13-16A-F_EN/3 OR H12C13-16A-F_C20/3

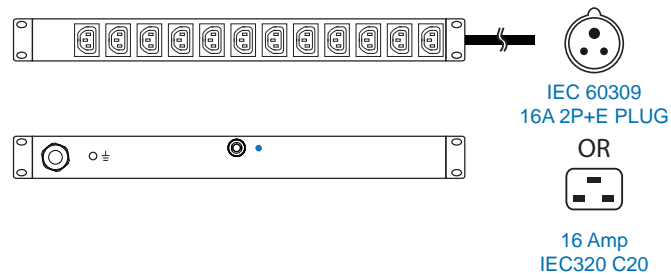

- Cordset : 3 meter 1.5mm sq H05V V-F cable with IEC60309 16A 2P + E or IEC320 C20 plug
- Fuse : 1 x 16A Resettable Fuse
- Input Rating : 16A / 250Vac
- Safety Regulatory : **FC** **CE**
- Environmental : **REACH**

Common Specification :

- Description : 12 outlets IEC320 C13
- Receptacles : 12 outlets IEC320 C13 10A Rated

- PDU Dimension : 44.5 (H) x 120 (D) x 437.5 (W) mm
- Packing :

- Net Weight :
- Gross Weight :

WARNING : The individual user should take care to determine prior to use whether this device is suitable, adequate or safe for the use intended. Since individual applications are subject to great variation, the manufacturer makes no representation or warranty as to the suitability or fitness of these devices for any specific application.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2013 Austin Hughes Electronics Ltd. All rights reserved.