


# PDU specification drawing

## 1-Phase 230V 10A / 13A / 16A / 20A basic PDU : UK x 8




20A model :	Fuse	MCB
H8UK90-20A-F_OE/3B-1	1	-
H8UK90-20A-CR_OE/3B-1	-	1

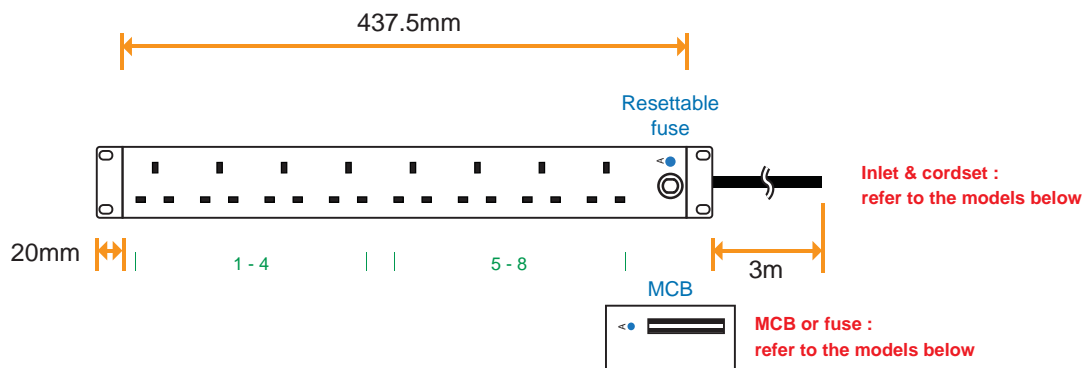

Input Rating : 20A, 230V  
Inlet : 20A open end  
Cordset : 3 meter 2.5mm sq. H05V V-F cordset  
Protection : 20A resettable fuse or  
20A hydraulic MCB x 1  
Circuit Details : Output 20A max. U K #1 - 8

13A model :	Fuse	MCB
H8UK90-13A_BS/3B-1	-	-
H8UK90-13A-CR_BS/3B-1	-	1



Input Rating : 13A, 230V  
Inlet : 13A BS1363 plug  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 13A glass fuse in BS1363 plug or  
13A hydraulic MCB x 1  
Circuit Details : Output 13A max. U K #1 - 8

16A model :	Fuse	MCB
H8UK90-16A-F_EN/3B-1	1	-
H8UK90-16A-CR_EN/3B-1	-	1



Input Rating : 16A, 230V  
Inlet : 16A IEC60309 2P+E plug  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or  
16A hydraulic MCB x 1  
Circuit Details : Output 16A max. U K #1 - 8

10A model :	Fuse	MCB
H8UK90-10A-F_C14/3B-1	1	-
H8UK90-10A-CR_C14/3B-1	-	1



Input Rating : 10A, 230V  
Inlet : 10A IEC320 C14 plug  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 10A resettable fuse or  
10A hydraulic MCB x 1  
Circuit Details : Output 10A max. U K #1 - 8

16A model :	Fuse	MCB
H8UK90-16A-F_C20/3B-1	1	-
H8UK90-16A-CR_C20/3B-1	-	1



Input Rating : 16A, 230V  
Inlet : 16A IEC320 C20 plug  
Cordset : 3 meter 1.5mm sq. H05V V-F cordset  
Protection : 16A resettable fuse or  
16A hydraulic MCB x 1  
Circuit Details : Output 16A max. U K #1 - 8

### Single phase basic PDU

Outlet : 13A Rated BS1363 UK x 8

**AUSTIN HUGHES**  
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2017 Austin Hughes Electronics Ltd. All rights reserved.

EMC Compliance : FCC & CE certified  
Safety Compliance : CE / LVD certified  
Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C  
Storage Temperature : -25 to 65 °C  
Operating Altitude : 0 to 2,000 m  
Storage Altitude : 0 to 15,000 m  
Humidity : 8 to 95% RH, non-condensing

Dimension : 437.5 (W) x 65 (D) x 55 (H) mm  
Material : Extrusion  
Color : Black