


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2013
 © COPYRIGHT 1999 TE Connectivity AMP España S.L.U. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2	M	ECR-13-001943	21FEB2013	LD JS


FINISHED CABLE DATA

CONDUCTORS	WIRE AWG	24 AWG Solid
	Ø RANGE (in mm)	0,485<=Ø<0,546
	MATERIAL	COPPER
	PLATING	BARE
ELONGATION	15% PER EN 50288-1	
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,00
DRAIN WIRE	Ø RANGE	0,4 - 0,55
	MATERIAL	COPPER
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	-
OVERALL SHIELD	FOIL MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
	BRAID MATERIAL	-
OVERALL SHIELD	PLATING	-
	COVERAGE	-
	ELONGATION	-
JACKET	MATERIAL	PVC
	OVERALL DIAMETER (D)	6,1 ±0.3 mm
PULLING FORCE	MAX.	100 N

- REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
- BASENR SPECIFIC PRINT LEGEND INFO:
CAT5E F/UTP SOLID PR04 AWG24 PVC
- CABLE COLORED TYPES UPON REQUEST.

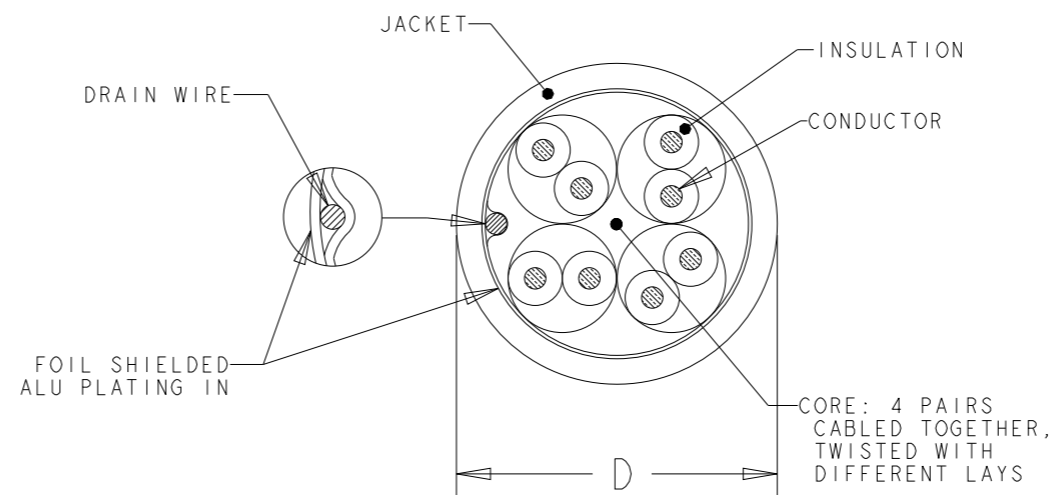

WHITE	500	REEL	219413-8
WHITE	305	REEL BOX	219413-7
WHITE	1000	REEL	219413-3
WHITE	305	PULL BOX	219413-2
WHITE	305	REEL	219413-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	21FEB2013	 TE Connectivity NAME CABLE, CAT5E, F/UTP, SOLID, PR04, AWG24, PVC	
DIMENSIONS: mm		CHK	21FEB2013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	21FEB2013		
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC	-		
MATERIAL -		FINISH	-	APPLICATION SPEC	-
		WEIGHT	-	SIZE	A3
		CUSTOMER DRAWING		CAGE CODE	-
		SCALE		DRAWING NO	©-219413
		SHEET		RESTRICTED TO	-
		OF		1	1
		REV		M	M